


SPECIFICATION:					
SYMBOL	PARAMETER	MIN.	TYPICAL	MAX.	UNIT
PO	CW OPTICAL POWER	-	30	-	mW
IOP	OPERATING CURRENT	-	-	150	mA
VOP	OPERATING VOLTAGE	-	24	-	V
λP	WAVELENGTH AT PEAK EMISSION	400	405	410	nm
TOP	OPERATING TEMP. RANGE	-10	-	80	°C
TSTG	STORAGE TEMP. RANGE	-40	-	85	°C
SPOT SIZE	ADJUSTABLE				mm
DRIVING CIRCUIT	APC CIRCUIT				
LENS	GLASS LENS				

更改 REV.	設變內容 MODIFICATION	日期 DATE	修改 DRAW	工程文件變更 ECN NO.
△	由圖號S2018012901TA轉正式料號	19/04/10	Elin	

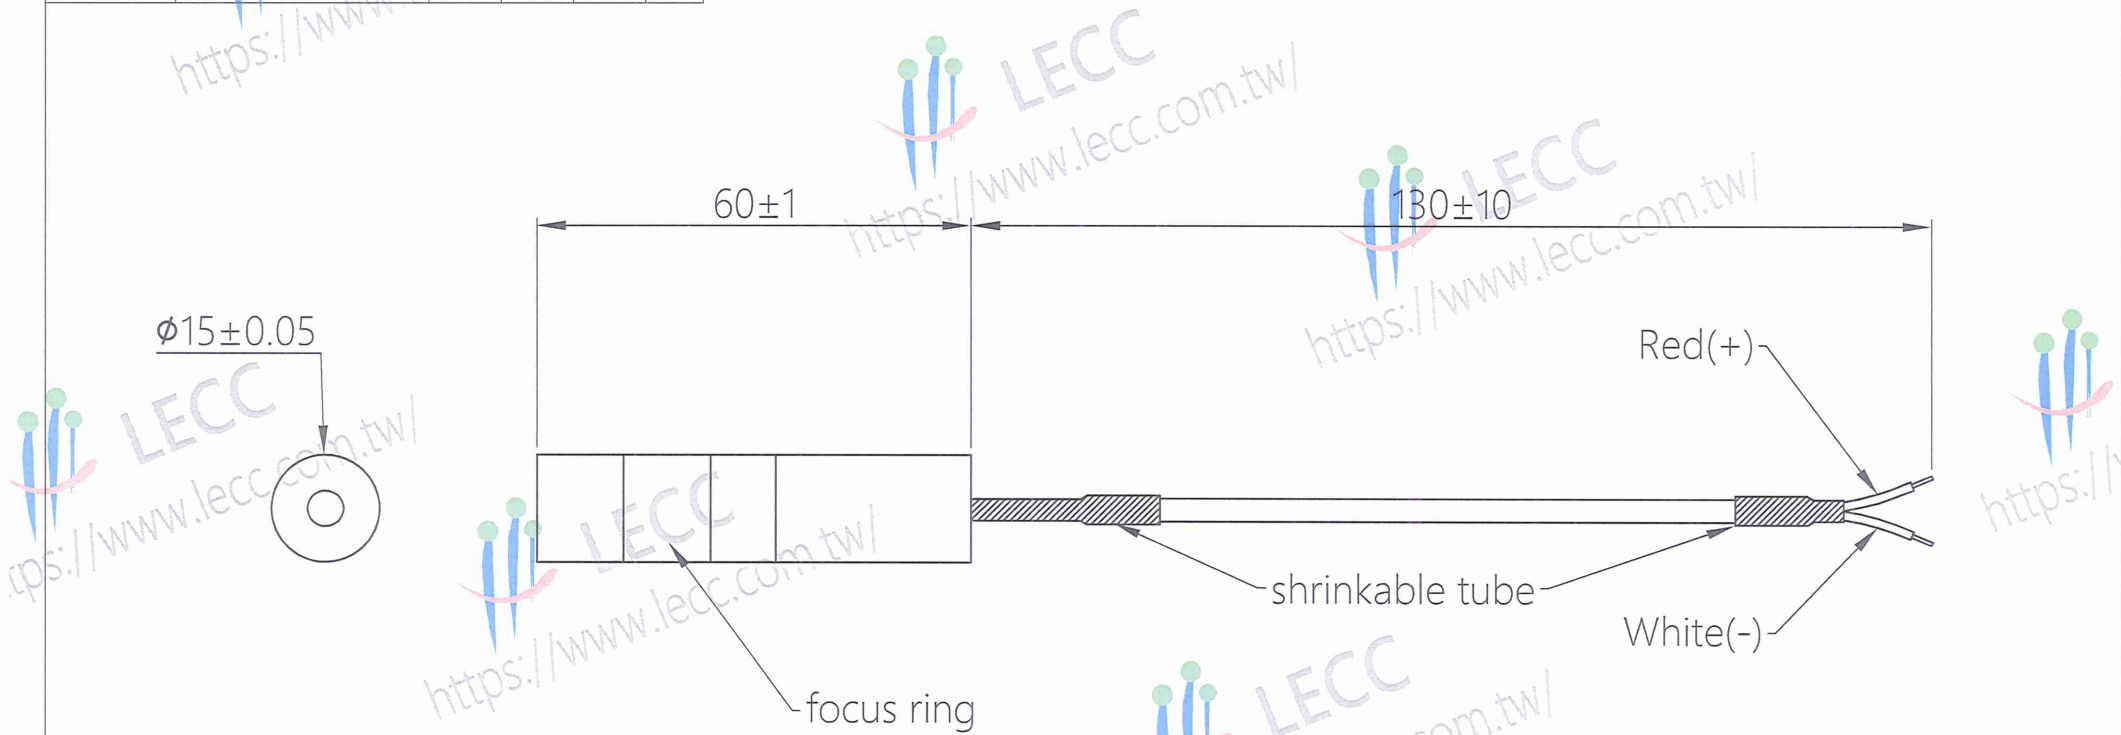

Notes :

1. Beam shape : Line
2. Fan angle : $30^{\circ} \pm 5^{\circ}$
3. Focus distance : Adjustable
4. When measuring power, focus at 100mm first and close to the power meter measurement.

本文件具有保密性及智慧財產權所有，未經同意，重製散布者，本公司將保留其法律追訴權



DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		產品規格 PROD.SPEC.	LECC	
.X± 0.15	X.*± 2	包裝規格 PKG.SPEC.	材質 MATERIAL	圖號 DWG NO.
.XXX±	.X*±			FD6F04031A
名稱 TITLE			備註 REMARK	
M40I8TE60A				
審核 APPROVE	核對 CHECK	製圖 DRAW	角法 PROJ	張數 SHEET
2019.04.10 張峰寬	2019.04.10 張峰寬	2019.04.10 符伊琳	第一角法	1/1
比例 SCALE			圖紙 SIZE	版本 REV.
1:1			A4	A