


SPECIFICATION:					
SYMBOL	PARAMETER	MIN.	TYPICAL	MAX.	UNIT
PO	CW OPTICAL POWER	0.5	0.75	0.9	mW
IOP	OPERATING CURRENT			40	mA
VOP	OPERATING VOLTAGE (battery operated)		3.2		V
λP	WAVELENGTH AT PEAK EMISSION		650		nm
TOP	OPERATING TEMP. RANGE	-10		50	°C
TSTG	STORAGE TEMP. RANGE				°C
SPOT SIZE	BEAM AT 4 METER			8	mm
DRIVING CIRCUIT	APC CIRCUIT				
LENS	PLASTIC LENS				

Bill Of Material		
Item	Part Name	Part Number
01	Housing	Housing
02	Rear Housing	MMUR013C01
03	Front Housing	MMUF023C01
04	Lens	MMLL500601
05	Spring	MMS5084B02
06	Laser Diode	L65504156C
07	PCB	AEPA500001
08	Red Wire	MEWR050D02
09	Black Wire	MEWB050D03

更改 REV.	设变内容 MODIFICATION	日期 DATE	修改 DRAW	核准 APPROVE	工程文件变更 ECN NO.
A	初版发行	2005/04/22	C.J		
B	LD变更: L65505156D 改为 L65504156C	2008/01/23	JYY		EC-08012302

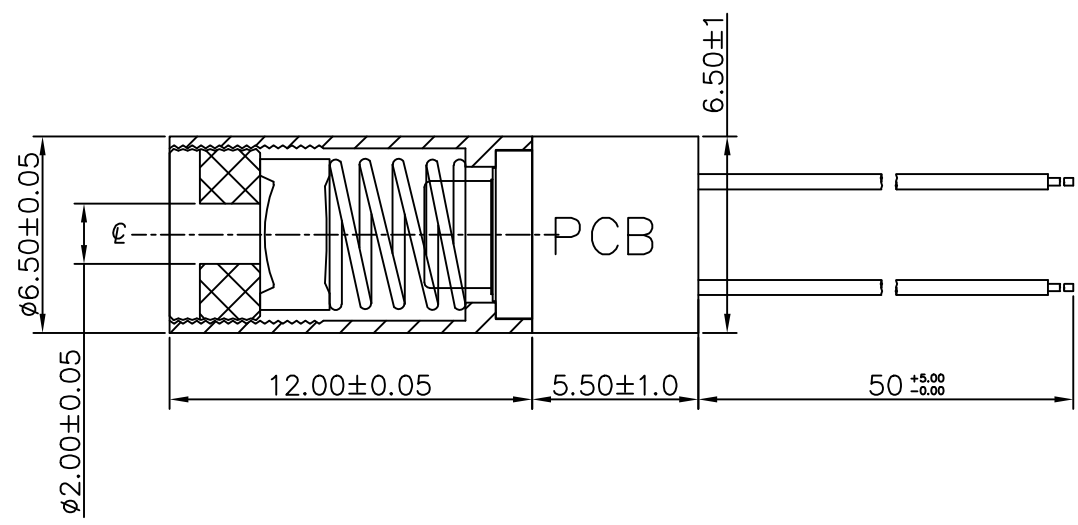

DIMENSION IN mm [Inch] TOLERANCE UNLESS OTHERWISE SPECIFIED		产品规格 PROD. SPEC.		
.X± 0.2	.X'± 2	包装规格 PKG. SPEC.		
.XX± 0.10	.X'±		图号 DWG NO.	FD6156510D
.XXX±			名称 TITLE	
M-5.2-6.5X12-6.5X5.5-4			CUSTOMER DRAWING	
审核 APPROVE	核对 CHECK	制图 DRAW	角法 PROJ.	张数 SHEET
		C.J	比例 SCALE	1/1
		2005/04/22	4:1	更改 REV.
			图纸 SIZE	A4

本文件具有保密性及智慧财产权所有，未经同意，重製散布着，本公司将保留其法律追溯权